

517, 202

(19) World Intellectual Property  
Organization  
International Bureau



08 DEC 2004




(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
**WO 2004/008803 A1**

- (51) International Patent Classification<sup>7</sup>: **H04R 25/00**  
// 1/02
- (21) International Application Number:  
PCT/DK2003/000399
- (22) International Filing Date: 16 June 2003 (16.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
PA 2002 01102 12 July 2002 (12.07.2002) DK
- (71) Applicant (for all designated States except US): **OTICON A/S** [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MEHR, Ulrik** [DK/DK]; Co OTICON A/S, Strandvejen 58, DK-2900 Hellerup (DK).
- (74) Agent: **POULSEN, Henning, Knak**; c/o Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SUSPENSION MEANS FOR TRANSDUCER

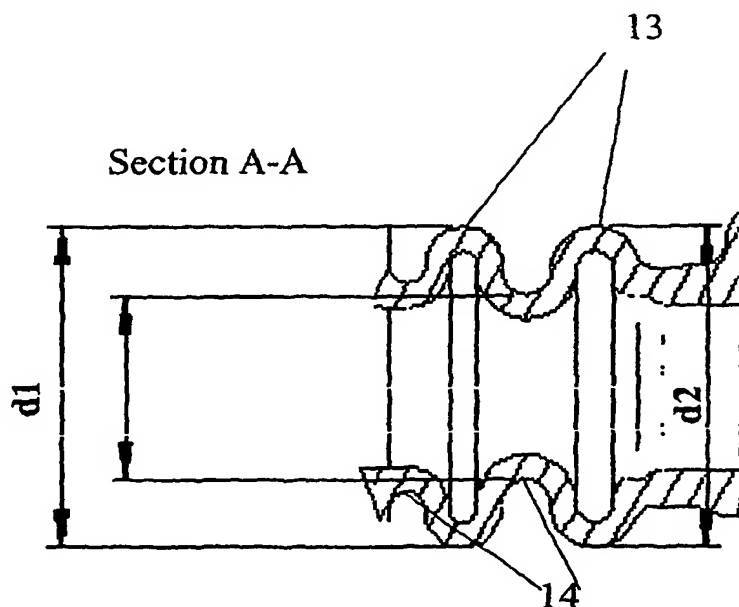

(57) Abstract: The invention concerns suspension means for transducer, where the suspension means also functions as a sound-guide for directing sound between the transducer and the external cabinet of an audio processing device, where the suspension is shaped as a tube which has means for forming a connection with the inlet/outlet of the transducer at a first end and means for forming a connection with the cabinet wall of the audio processing device at a second end in order to guide sound through the tube, where the intermediate part of the tube in the length direction has alternating wide and narrow parts.

WO 2004/008803 A1

## TITLE

Suspension means for transducer.

## AREA OF THE INVENTION

5 Suspension means for transducers are used in various acoustic equipment, and especially in hearing aids the play an important role in the overall performance of the apparatus. One of the issues, which in hearing aids are influenced by the performance of the suspensions is damping of vibrations transmitted from the casing material through the suspension to the transducer. Also the receiver will vibrate at normal operation and  
10 sound and vibration is radiated into the casing. This sound and vibration must be prevented from reaching the microphone.

## BACKGROUND OF THE INVENTION

In an attempt to solve the above problem the transducers of hearing aids are isolated  
15 from the casing or shell of the hearing aid by flexible suspension means. Also the canal bringing audio signals to/from the transducers is made of a resilient material in order to counteract the transmission of vibrations from the casing to the transducer. The invention seeks to improve the canals ability to transport the sound signals to/from the transducers without transmitting vibrations through the canal walls.

20

## SUMMARY OF THE INVENTION

This is achieved by a suspension means for a transducer, where the suspension means also functions as a sound-guide for directing sound between the transducer and the external cabinet of an audio processing device, where the suspension is shaped as a tube  
25 which has means for forming a connection with the inlet/outlet of the transducer at a first end and means for forming a connection with the cabinet wall of the audio processing device at a second end in order to guide sound through the tube, where the intermediate part of the tube in the length direction has alternating wide and narrow parts.

30 The alternation between narrow and wide parts of the tube aids to dampen vibrations transmitted inside the wall material of the tube, and this help to isolate the transducer from the cabinet/shell part of the hearing aid. The reduction of the transmission of vibrations is in part due to the longer path, which the vibrations has to travel through the

CONFIRMATION COPY

material of the tube, due to the wide and narrow parts of the tube. This allows the use of a more stiff material without sacrificing the damping effect from shell to transducer.

In an embodiment the wide and narrow parts are shaped as circumferentially extending bellows. This shape is very easy to produce in injection molding technique. The bellows could be circular or follow a thread like path along the length of the tube like structure.

In another embodiment the circumference of the tube like structure is oval shaped. This helps to provide an opening with a wide cross section.

In a further embodiment where at least two consecutive sections each comprising a wide and a narrow part, the consecutive sections are shaped to have unlike resonance frequencies. This is an advantage because at the resonance frequency of one section the consecutive section will dampen vibrations/sounds and vice versa. The sections can be made with unlike resonant frequencies in a number of different ways: consecutive sections may have different sizes of the wide and/or narrow parts, they may be shaped with different thickness of the walls, diverse material may be used for consecutive sections creating differences in resilience and/or density of the sections. Also combinations of these possibilities is an option.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a suspension for a hearing aid receiver and

Fig. 2 shows a part of a hearing aid with the shell partially removed so that the suspension for the microphone is visible.

Fig. 3 is a sectional view through the bellows part of the microphone suspension shown in fig. 2

Fig. 4 is a side view of the bellows part of the microphone suspension in fig. 2.

#### DESCRIPTION OF A PREFERRED EMBODIMENT

The suspension 1 in fig. 1 is a receiver suspension, and it has an opening 3, which is supposed to receive a sound conveying pipe which guides the sound toward the ear. An

outwardly directed flange 2 surrounds the opening 3 and may be held in place by suitable fastening means within the shell of the hearing aid. At the other end the suspension is shaped to fit snugly around the snout part of a hearing aid receiver (not shown).

Between the flange part 2 and the receiver end the suspension 1 is shaped as a pipe like structure which has alternating wide and narrow parts. A wide part 4 is shown in the middle between two narrow parts 5,6.

In fig. 2 a suspension 10 for a microphone 11 is shown. The suspension 10 comprises a tube like structure with an inlet 12 at one end thereof and a microphone 11 coupled to the other end thereof. The inlet 12 is coupled to the cabinet 15 of the hearing aid at the surface thereof, and sound impinging on the hearing aid from the surroundings enters the inlet 12 and propagates inside the tube towards the microphone 11. Between the microphone 11 and the inlet 12 the tube is shaped with consecutive wide and narrow parts 13, 14. The wide and narrow parts prevent vibrations from propagating along the length of the tube within the tubing material. Thereby the microphone becomes more effectively isolated from the shell or cabinet 15 of the hearing aid. This is very important as only sounds generated in the environment are intended to reach the microphone 11, whereas sounds from within the hearing aid and vibrations propagating along the cabinet structure are considered as noise and should be damped as far as possible.

In the shown embodiment the tube is also oval in cross section. This has the effect that an opening with a wider area is achieved while the height of the apparatus is kept low.

In Fig. 3 and 4 the wide parts 13 and narrow parts 14 are shown, whereas the other parts of the suspension are not shown. Due to the oval shape of the bellow, the measure of the wide parts and narrow parts  $d_1$ ,  $d_2$  and  $d_3$  in fig 3 are smaller than the corresponding perpendicular measures  $D_1$ ,  $D_2$ , and  $D_3$  in fig. 4. In the displayed embodiment the wide parts  $d_1$  and  $d_2$  are the same and preferably this measure is between 2 and 3 mm and preferably 2.6 mm. The size of  $d_3$  is between 1 and 2mm and is preferably set to 1.5mm. The size of  $D_1$  and  $D_2$  is also the same and ranges between 3 and 4mm and is preferably 3.8mm. The size of  $D_3$  is between 2 and 3 mm and preferably 2.7mm. The difference between  $d_1$  and  $D_1$  or  $d_2$  and  $D_2$  defines the extent of deviation from a round shape and more or less pronounced deviation is possible within the basic idea of the invention.

From fig. 2 it is clear that the oval shape is nice and rounded, but a more square shape would also work.

From Fig. 4 the length of the two wide parts can be seen and it is clear that the two  
5 lengths L1 and L2 are not the same. Hereby it is ensured that consecutive sections  
comprising wide and narrow parts do not have the same resonance frequencies. In this  
case L1 is chosen to 0.60mm and L2 is chosen to 0.69mm and L3 is chosen to 0.40mm.  
For the function of the invention the actual sizes are not crucial, but the difference in size  
between L1, L2 and L3 is of importance. The L1-L3 measures define the size of the  
10 diameter of the circular arch part forming the surface of the respective bellow units in a  
radial plane. When varying one parameter like the L measure, it is important to not vary  
other parameters like the material thickness, as such a variation might counteract the  
variations in the L measure. This could cause similar resonance frequencies of  
consecutive bellows sections even if the L or diameter measures are varied. In this  
15 detailed example the bellows is used as a microphone suspension in a hearing aid, but for  
other components the sizes would have to be scaled according to the components in  
question.

## CLAIMS

1. Suspension means (1,10) for transducer, where the suspension means (1,10) also  
functions as a sound-guide for directing sound between the transducer and the  
5 external cabinet of an audio processing device, where the suspension (1,10) is shaped  
as a tube which has means for forming a connection with the inlet/outlet of the  
transducer at a first end and means for forming a connection with the cabinet wall  
(15) of the audio processing device at a second end in order to guide sound through  
the tube, where the intermediate part of the tube in the length direction has  
10 alternating wide and narrow parts .
2. Suspension means as claimed in claim 1, where the wide and narrow parts are shaped  
as circumferentially extending bellows.
- 15 3. Suspension means as claimed in claim 1 or claim 2, whereby the circumference of  
the tube is oval shaped.
4. Suspension means as claimed in one of the above claims having at least two  
consecutive sections each comprising a wide and a narrow part, where the  
20 consecutive sections are shaped to have unlike resonance frequencies.

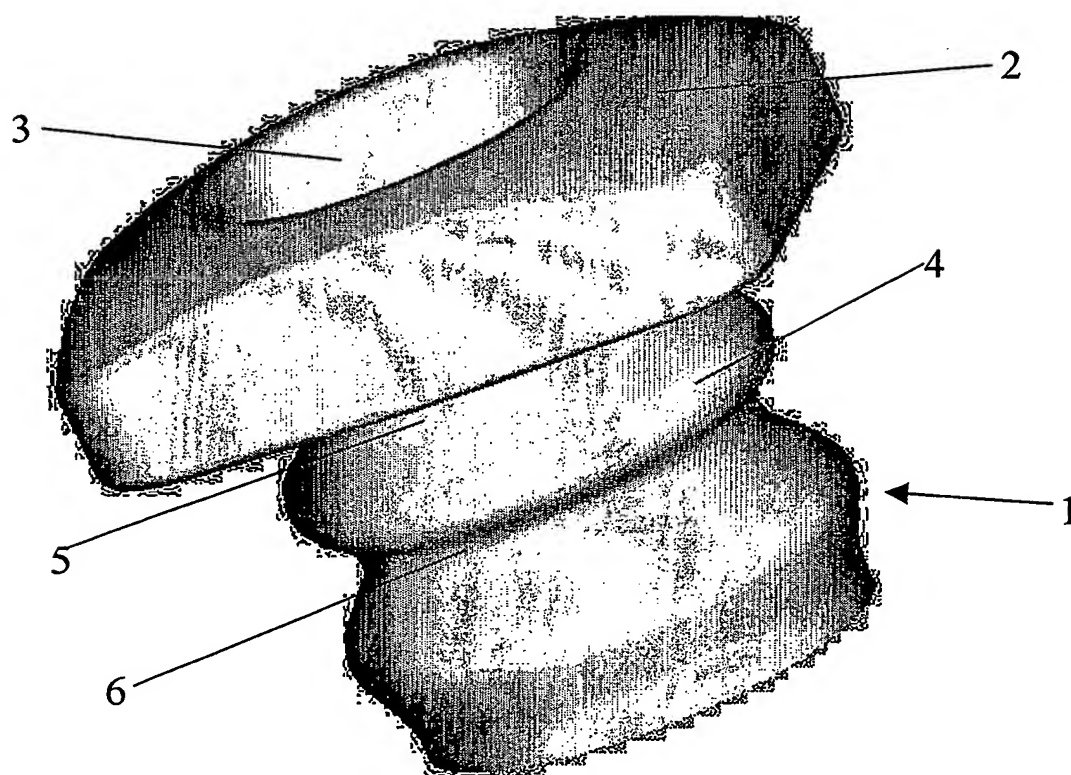


Fig. 1

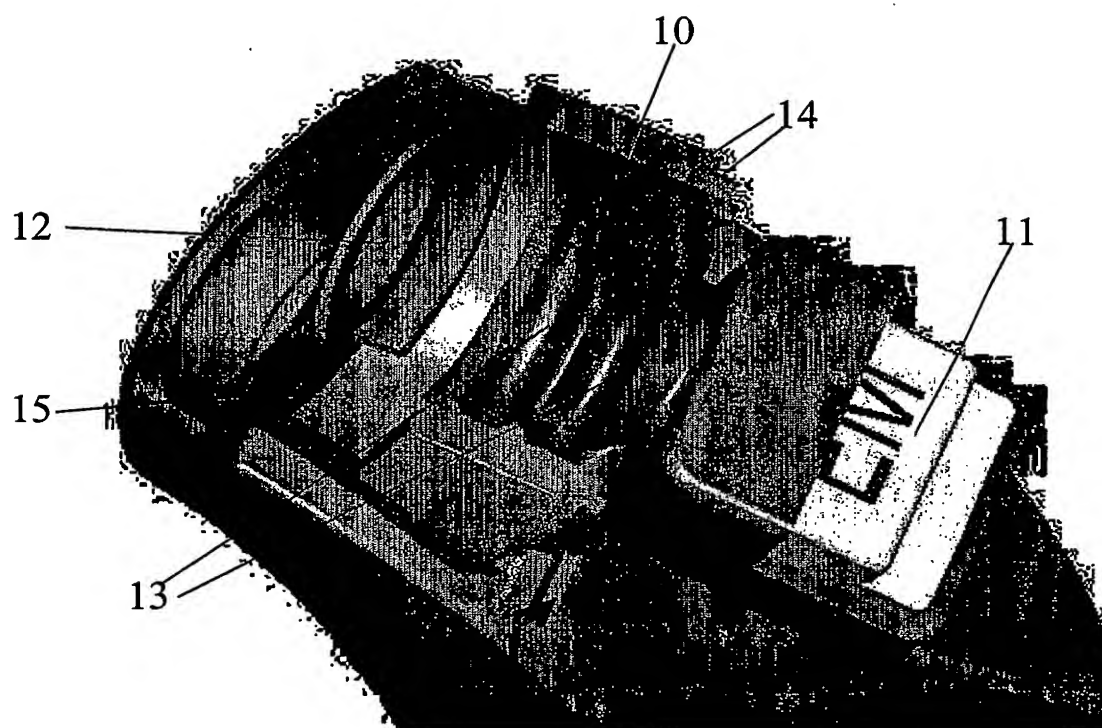


Fig. 2



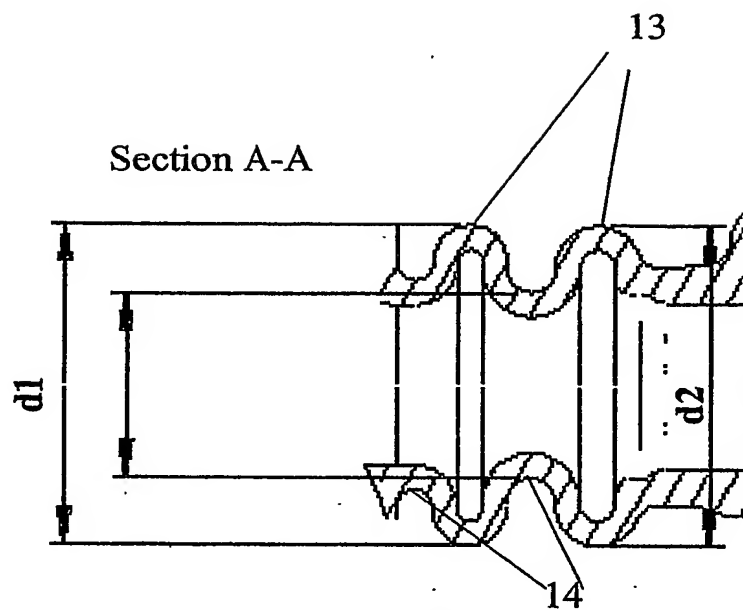


Fig. 3

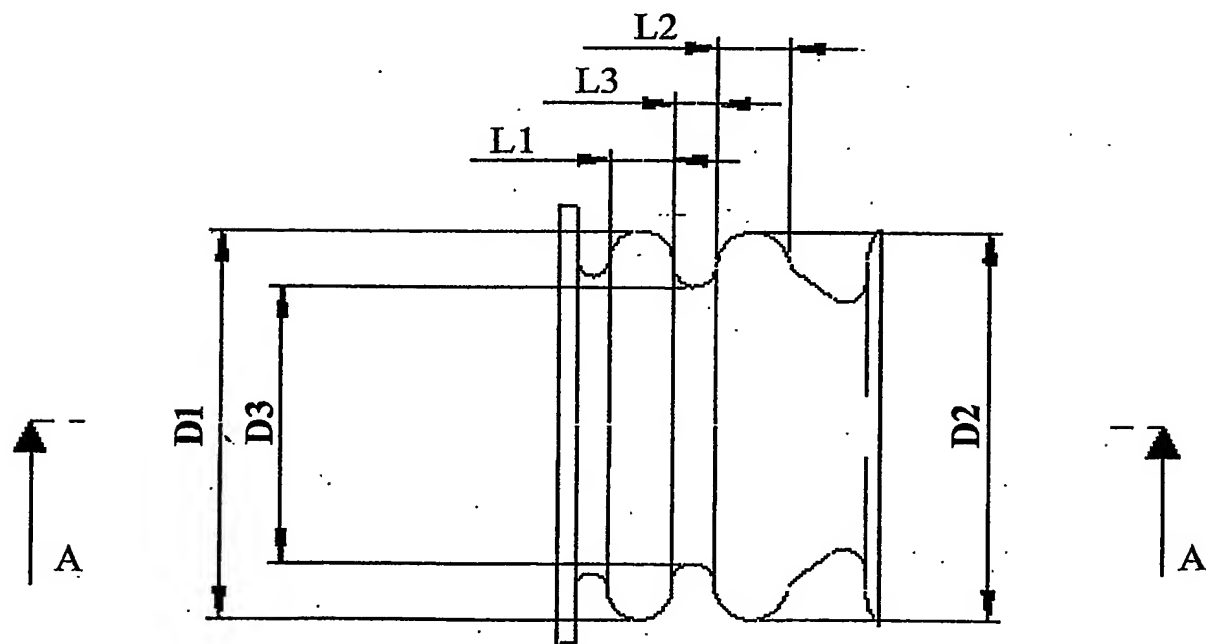


Fig. 4

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00399

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC 7 H04R25/00 //H04R1/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| X          | WO 01 43498 A (SONIC INNOVATIONS INC)<br>14 June 2001 (2001-06-14)<br>page 4, line 10 - line 19<br>abstract; claims 1-5<br>---                | 1-4                   |
| X          | WO 00 72632 A (SONIC INNOVATIONS INC)<br>30 November 2000 (2000-11-30)<br>page 3, line 22 -page 4, line 4<br>page 5, line 17 - line 26<br>--- | 1-4                   |
| A          | US 5 864 628 A (POSEN MILES ET AL)<br>26 January 1999 (1999-01-26)<br>the whole document<br>---   | 1-4                   |
| A          | US 4 729 451 A (BRANDER RICHARD ET AL)<br>8 March 1988 (1988-03-08)<br>the whole document<br>---<br>-/--                                      | 1-4                   |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

10 October 2003

Date of mailing of the international search report

06.11.2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

HENRIK ANDERSSON/JAA

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00399

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT |   |                       |
|--|---|-----------------------|
| Category *   | Citation of document, with indication, where appropriate, of the relevant passages                                      | Relevant to claim No. |
| A  | <p>US 4 440 982 A (KAANDERS JOHANNES M G M<br/>ET AL) 3 April 1984 (1984-04-03)<br/>the whole document</p> <p>-----</p> | 1-4                   |

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00399

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---|---------------------|----------------------------|---------------------|
| WO 0143498                                | A | 14-06-2001          | AU 2067001 A               | 18-06-2001          |
|   |   |                     | WO 0143498 A1              | 14-06-2001          |
| WO 0072632                                | A | 30-11-2000          | AU 4853000 A               | 12-12-2000          |
|   |   |                     | WO 0072632 A2              | 30-11-2000          |
| US 5864628                                | A | 26-01-1999          | US 5712918 A               | 27-01-1998          |
|   |   |                     | CA 2165389 A1              | 28-07-1996          |
|   |   |                     | DE 69614895 D1             | 11-10-2001          |
|   |   |                     | DE 69614895 T2             | 28-03-2002          |
|   |   |                     | DK 724377 T3               | 26-11-2001          |
|   |   |                     | EP 0724377 A1              | 31-07-1996          |
|   |   |                     | JP 8265898 A               | 11-10-1996          |
|   |   |                     | US 5970157 A               | 19-10-1999          |
| US 4729451                                | A | 08-03-1988          | CA 1226529 A1              | 08-09-1987          |
|   |   |                     | JP 1755814 C               | 23-04-1993          |
|   |   |                     | JP 4044879 B               | 23-07-1992          |
|   |   |                     | JP 61024400 A              | 03-02-1986          |
| US 4440982                                | A | 03-04-1984          | NL 8101286 A               | 18-10-1982          |
|   |   |                     | DE 3209397 A1              | 30-12-1982          |
|   |   |                     | FR 2502440 A1              | 24-09-1982          |
|   |   |                     | GB 2096863 A ,B            | 20-10-1982          |
|   |   |                     | JP 57162600 A              | 06-10-1982          |